


Serial Numbers, 731A/P31	<u>10638/3337</u>	Nominal Low End Frequency Response	Mounted Resonance	<u>809</u> Hz
Voltage Sensitivity	<u>9.6</u> V/g	-1dB	<u>0.10</u> Hz	Max Amplitude Range
Transverse Sensitivity	<u>< 1</u> % of axial	-3dB	<u>0.05</u> Hz	<u>0.5</u> g Peak
P31 settings	Gain x1 Filter 450 Hz		Calibrated by	<u>Thep Phoubandith</u> 9-21-17
				Date

B: SN: 10638/3337 Xr: 412.7926 Hz Yr: -2.96997 dB

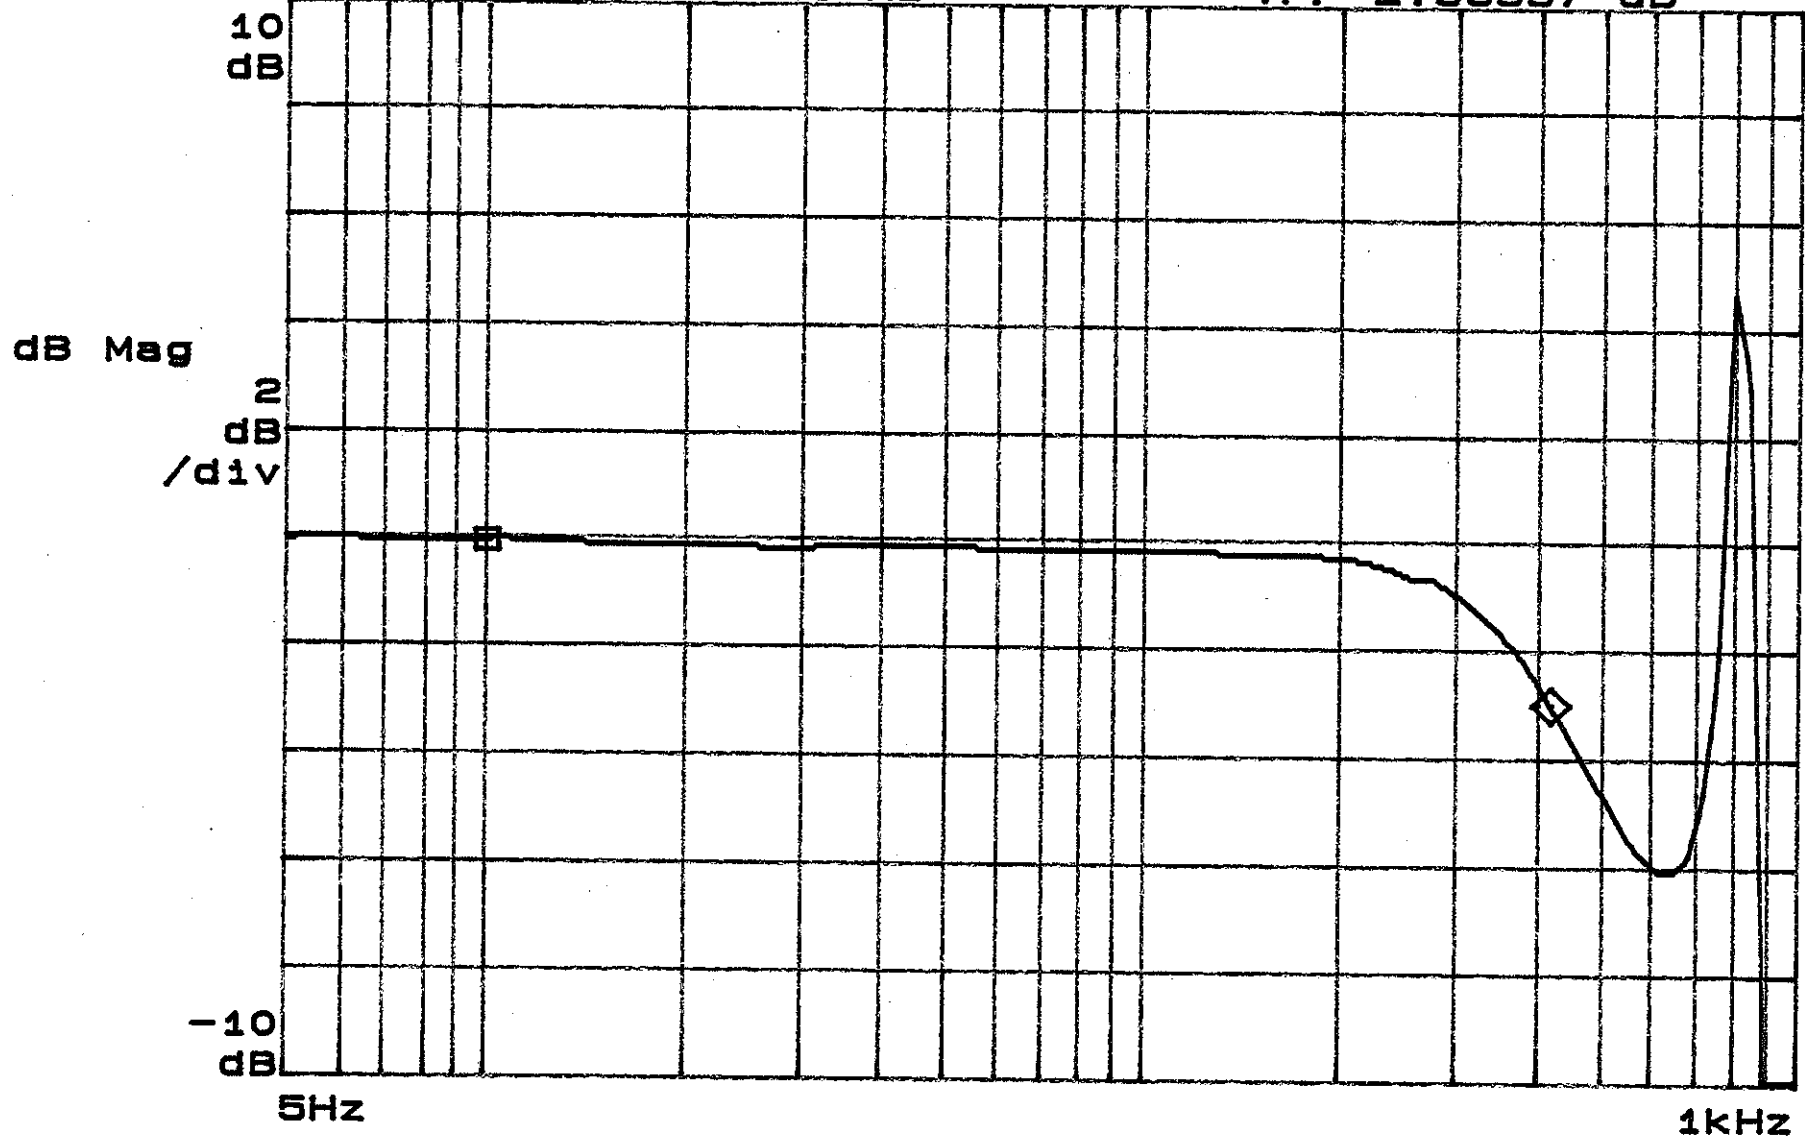

Reference Sensitivity at 10 Hz, 25°C. This calibration is traceable to the National Institute of Standards and Technology, Gaithersburg, MD